



## UNX100100A

### Application:

Entertainment Venue, Logistics, Exhibition Hall, Tourist Attractions, Shopping Mall, Churches, Museum, Aviation, Stadium, Terminal, Ports, Railway Station, Metro, Customs, Office Building, Campus, Hotels, Factories, Sports Center, etc.


### Product Features:

- Inspection Speed of 0.22m/s (0.4m/s, 0.67m/s optional)
- Steel penetration of 43mm
- Max. inspection object size of 1000mm×1000mm
- Remote technical support
- In compliance with international safety standards, X-ray dose rate is close to naturally occurring radiation
- Accurate material recognition: Orange for organic matter, blue for inorganic, green for metal and compound
- Affiliated explosives and narcotics detection enables auto-alert upon the presence of explosives and narcotics

### Technical Specifications:

X-ray Baggage Scanner for Aviation/Railway Station/Metro/Logistics	
<b>System Parameters</b>	
Dimensions	3350mm[L]x1600mm[W]x1800mm[H]
Tunnel Size	1000x1000mm
Weight	1450kg
Conveyor Height	330±30mm
Inspection Speed	0.22m/s (0.4m/s, 0.67m/s optional)
Max. Load Weight	200kg
Resolution	40AWG (φ=0.0787mm metal wire)
Penetration	43mm steel/φ=0.16mm metal wire
Radiation Safety	Meets film safety ISO 1600
X-ray Dose Rate	< 0.5μSv/h (5cm away from the housing)
<b>X-ray Generator</b>	
Anode Voltage	140kV-160kV ( adjustable )
Cooling•Cycle	Oil Cooling•100%
Single Inspection Dose	< 3.0 μ Gy
<b>Imaging System</b>	
X-ray Detector	Photodiode
Gray Level	4096
Monitor	19"
<b>Image Processing System</b>	
Image Enhancement	*Black and white *Inverse *High-energy penetration *Low-energy penetration *Super-enhancement *Elimination of organic or inorganic substances *Variable absorption rate *Pseudo-color *Arbitrary selection (user selected ROI zoom) (64X image magnification/no loss of resolution)
Recognition	Orange for organic matter, blue for inorganic, green for metal and compound
Image Playback	50 inspected images could be replayed
Storage Capacity	No less than 100 thousand pieces of image
<b>Additional Features</b>	
*Date/time display *Baggage counter *User management *System operation clock *X-ray on clock *POST *Image storage & retrieval *Diagnosis & maintenance *Dual-scan *Image recognition training *Cloud data storage and analysis	
<b>Standard Functions</b>	
*High density area alarm *Explosives and drugs auxiliary examination *Dangerous goods image insertion	
<b>Optional Functions</b>	
<b>Installation Requirements</b>	
Operation/Storage Temperature	0~40°C/-5~50°C
Humidity	10%~90% (No condensation)
Power Supply	220VAC±5% 50Hz/60Hz

### Machine Footprint:

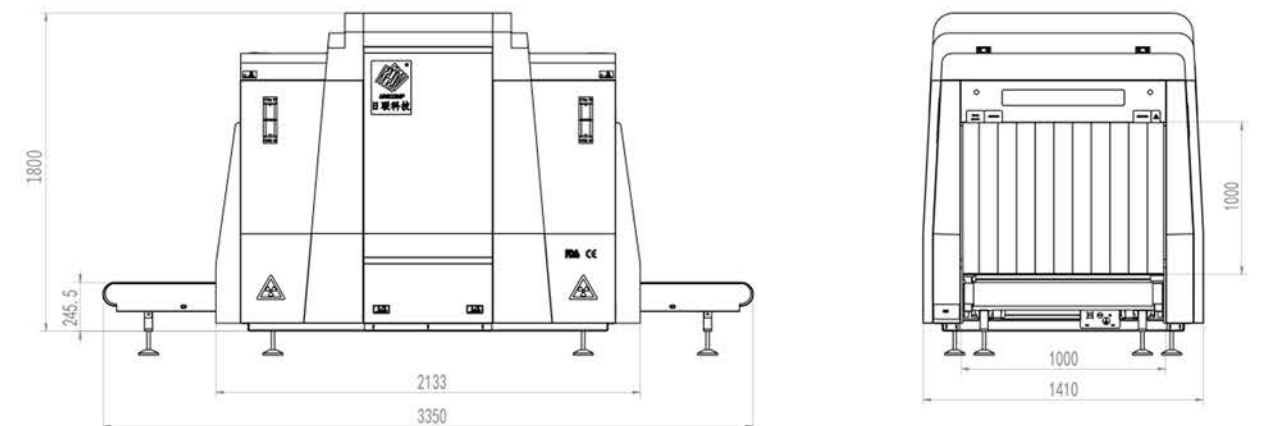

Unit: mm